

Phocus3m

Remote Leak detection utilising GPRS and 3G communications


Phocus3m is an acoustic logger that automatically detects and localises leaks on water distribution networks. The *Phocus3m* is deployed underground and utilises low cost GPRS and 3G telecommunications* without the need for costly above ground technology.

Benefits

- Remote leakage identification to reduce leak run-time and improve efficiency
- PrimeWeb map based data available using a web browser
- Leak confirmation
 - Audio files available for remote listening to confirm presence of leak noise
 - Evaluation of daily leak noise histogram
- Phocus noise algorithm reduces incidence of undetected leaks
- Three sample periods to separate usage from leakage thus reducing false alarms
- No infrastructure above ground required
- One, small, low cost logger per installation
- Embedded roaming SIM for optimum network communications



Connectivity and data retrieval

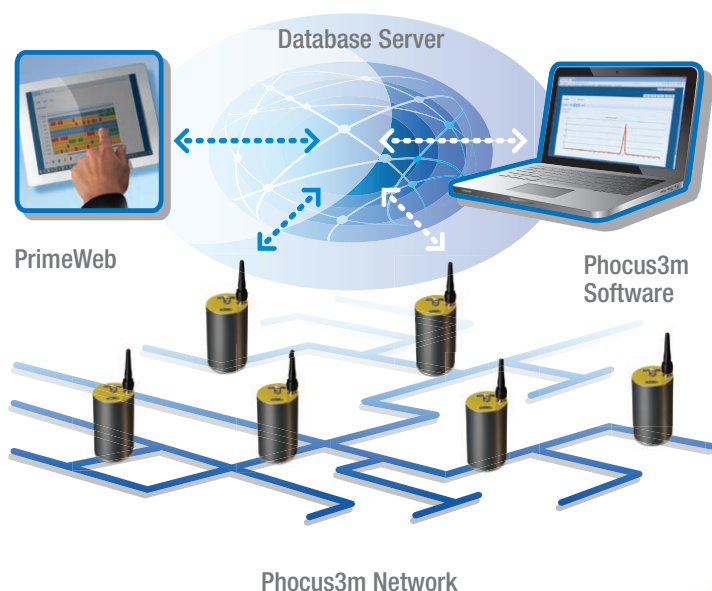

Rapid leak identification

Use of modern telecommunications network technology enables rapid identification of leak alarm status to facilitate reduction of leakage levels. Data is monitored on the *Phocus3* software or on an internet browser via *PrimeWeb*. Indication of leak status via Google Maps allows easy identification and management of leakage teams.

* sms facility available, contact Primayer for details



technology for network management and leakage control

Primayer

Operation

The logger samples pipeline noise at one second intervals during each of three sample periods (termed epochs) during the night when background acoustic noise is lowest. Statistical analysis on each of the three epochs determines the Leakage Confidence Factor. If this is high a leak has been detected. The lowest leak noise amplitude, termed the Critical Noise Value, is also measured and can be a useful indication of how close to the leak the logger is situated.


Leak confirmation – listen remotely to the leak noise

When the Leakage Confidence Factor is high the leak noise audio file is transmitted. This allows operators to remotely listen to the noise and confirm the presence of a leak prior to sending leakage teams to site.



Logger characteristics


- Intelligence in logger to determine the presence and level of leak noise
- Large data memory
- GPS location stored – no need to mark position on paper map
- High sensitivity integral accelerometer
- Small size
- Powered for up to 5 years (dependent upon GPRS/3G signal conditions)
- Submersible to IP68

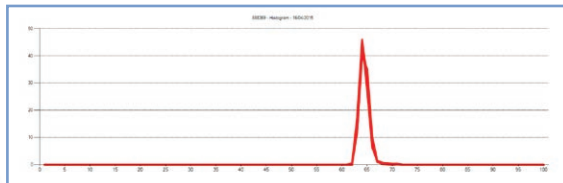

Histogram display aids leak confirmation

On-site data and leak listening


On-site display of the most recent Leakage Confidence Factor and Critical Noise Value is available via the Communications Module. Live leak listening can also be carried out to confirm the presence of a leak. All data can also be downloaded into the Communications Module for transfer directly to the host software or, alternatively, for upload to a server.

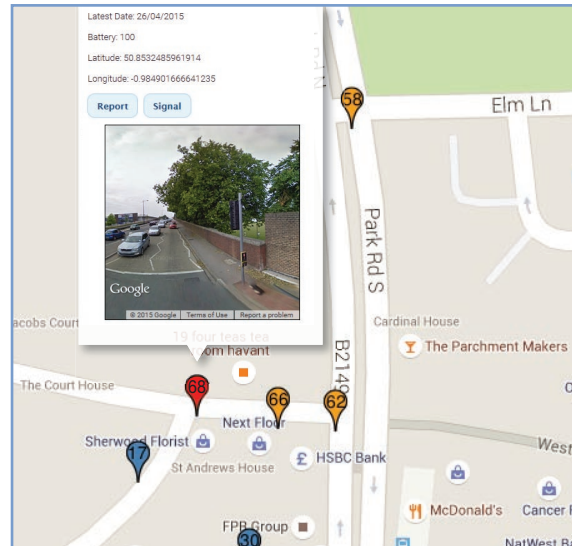

Courtesy of Google Maps

Data for managing leakage

Leak noise data and audio files are transmitted to a server and analysed via the Phocus3 software or available on-line using *PrimeWeb*. Loggers are shown over large or small areas using Google Maps and colour coded to show leak alarm status indicating the location of potential leakage. Clicking on an individual logger shows full current and historical data in tabular, histogram and graphical formats. 'Street view' of the logger's location is also available. Reports are available for field leakage teams.

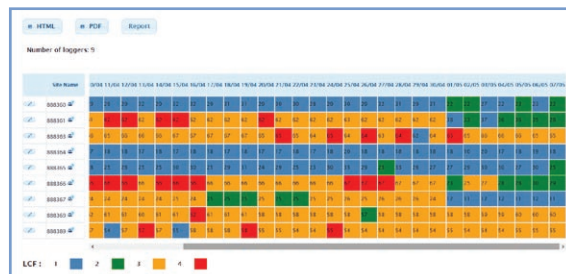

Status report for deployed loggers

Part Numbers

Phocus3m logger (GPRS communication) - with stub antenna	BXG-201
Phocus3m logger (GPRS+3G communication) - with stub antenna	BXG-202
Phocus3m logger (GPRS communication) - with underground remote antenna	BXG-203
Phocus3m logger (GPRS+3G communication) - with underground remote antenna	BXG-204
Wire rope (for lowering into deep chambers)	PP650131



Primayer Limited

Primayer House, Parklands Business Park
Denmead, Hampshire PO7 6XP, United Kingdom
T +44 (0)2392 252228 F +44 (0)2392 252235
E sales@primayer.com
www.primayer.com



Information in this document is subject to change without notice.